

SOT-23 Plastic-Encapsulate Transistor (PNP)


Feature

- Complementary to MMBT2222
- Power Dissipation of 250mW
- High Stability and High Reliability

Mechanical Data

- SOT-23 Small Outline Plastic
- Package Epoxy UL: 94V-0
- Mounting Position: Any

SOT-23



Marking: M2B

Maximum Ratings & Thermal Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	-60	V
Collector-Emitter Voltage	V_{CEO}	-40	V
Emitter -Base Voltage	V_{EBO}	-5	V
Collector Current-Continuous	I_C	-600	mA
Collector Power Dissipation	P_C	250	mW
Junction Temperature	T_j	150	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-55-+150	$^{\circ}\text{C}$
Thermal resistance From junction to ambient	$R_{\theta JA}$	500	$^{\circ}\text{C/W}$

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Limit		Unit
			Min	Max	
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=-100\mu\text{A}, I_E=0$	-60		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}^*$	$I_C=-1\text{mA}, I_B=0$	-40		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=-10\mu\text{A}, I_C=0$	-5		V
Collector cut-off current	I_{CBO}	$V_{CB}=-50\text{V}, I_E=0$		-20	nA
Emitter cut-off current	I_{EBO}	$V_{EB}=-3\text{V}, I_C=0$		-10	nA
Collector cut-off current	I_{CEX}	$V_{CE}=-30\text{V}, V_{BE(off)}=-0.5\text{V}$		-50	nA
DC current gain	$h_{FE(1)}^*$	$V_{CE}=-10\text{V}, I_C=-150\text{mA}$	100	300	
	$h_{FE(2)}^*$	$V_{CE}=-10\text{V}, I_C=-0.1\text{mA}$	52		
	$h_{FE(3)}^*$	$V_{CE}=-10\text{V}, I_C=-500\text{mA}$	32		
Collector-emitter saturation voltage	$V_{CE(sat)1}^*$	$I_C=-150\text{mA}, I_B=-15\text{mA}$		-0.4	V
	$V_{CE(sat)2}^*$	$I_C=-500\text{mA}, I_B=-50\text{mA}$		-0.67	V
Base -emitter saturation voltage	$V_{BE(sat)1}^*$	$I_C=-150\text{mA}, I_B=-15\text{mA}$		-1.00	V
	$V_{BE(sat)2}^*$	$I_C=-500\text{mA}, I_B=-50\text{mA}$		-1.20	V
Transition frequency	f_T	$V_{CE}=-20\text{V}, I_C=-50\text{mA}, f=100\text{MHz}$	200		MHz
Delay time	t_d	$V_{CE}=-30\text{V}, I_C=-150\text{mA}, I_{B1}=-15\text{mA}$		10	nS
Rise time	t_r			25	nS
Storage time	t_s	$V_{CE}=-6\text{V}, I_C=-150\text{mA}, I_{B1}=I_{B2}=-15\text{mA}$		225	nS
Fall time	t_f			60	nS







*Pulse test: pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2.0\%$



Classification of h_{FE}

h_{FE}	100~300	
Rank	L	H
Range	100~200	200~300






Typical Characteristics

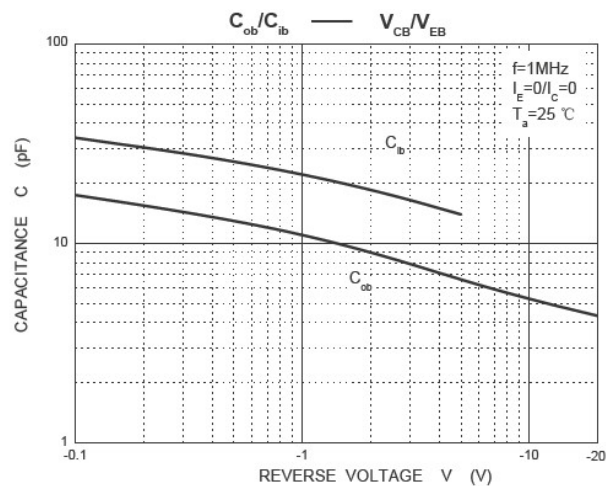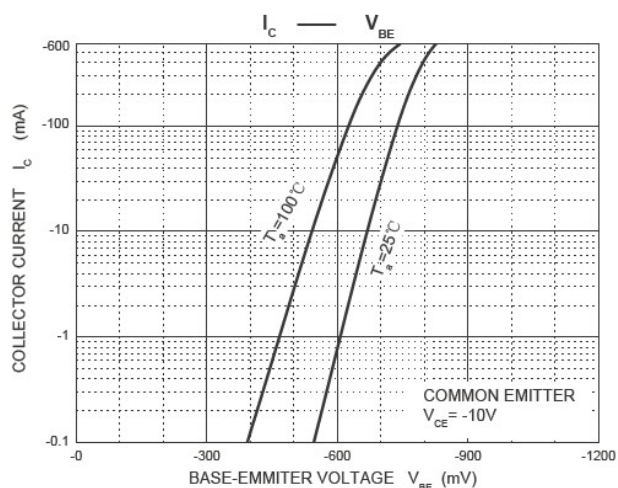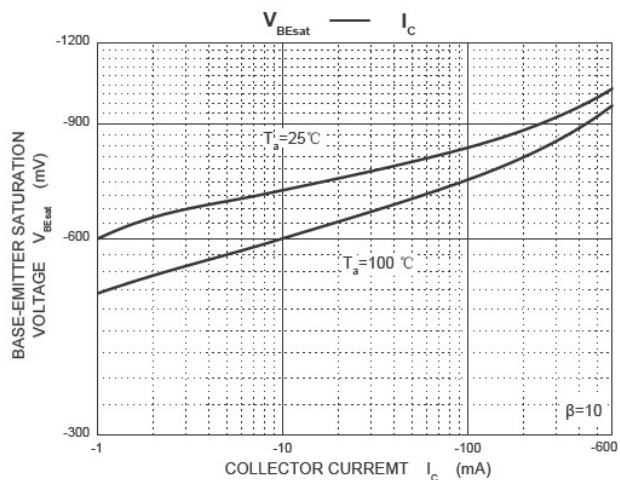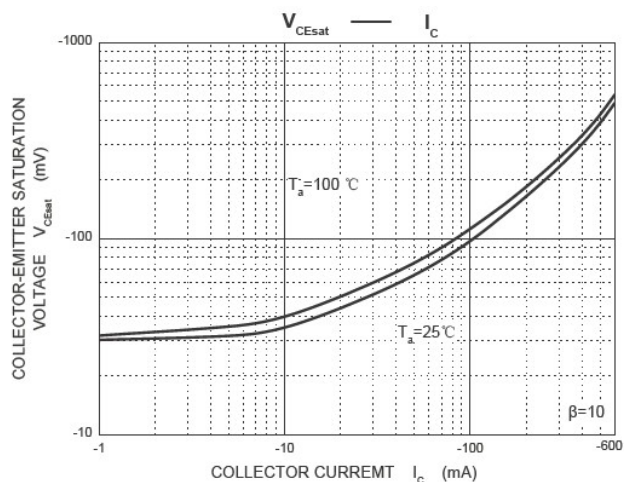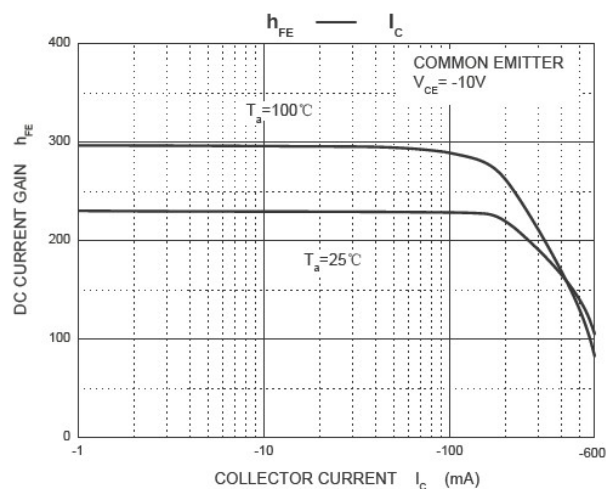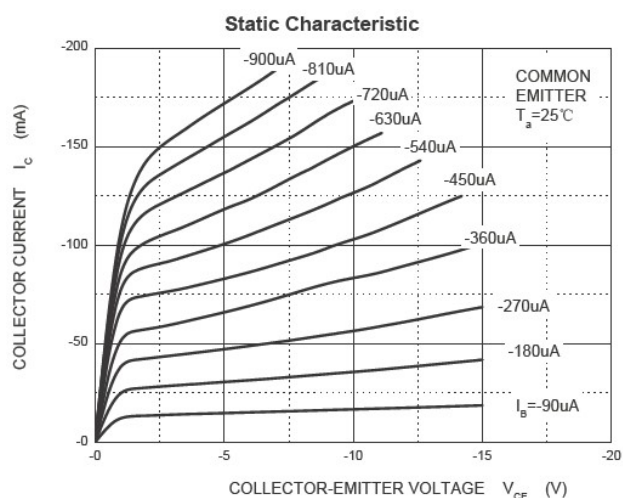

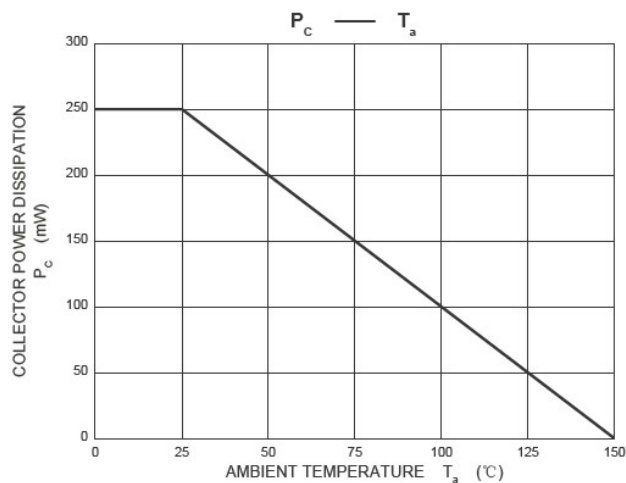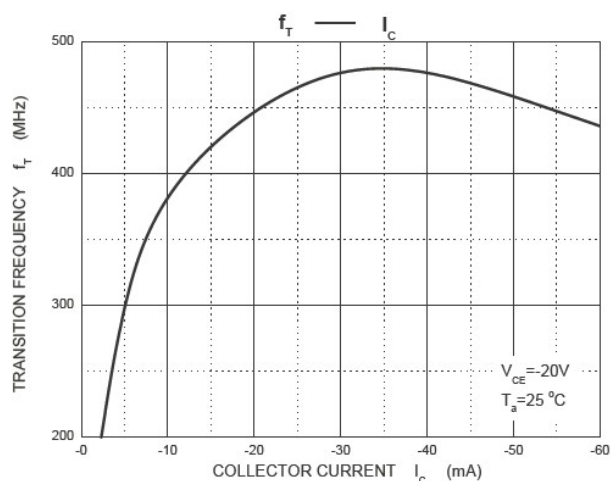


SOT-23 Package Dimension



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout



Notes:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.