



DW2.8-4LVUB-S ESD Protection Diode

Feature

- 800Watts peak pulse power ($t_p = 8/20\mu s$)
- Working voltage: 2.8V
- Junction Capacitance: 1.5pF(Typ)
- Low clamping voltage
- Low leakage current
- IEC 61000-4-2 $\pm 30kV$ contact $\pm 30kV$ air
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 40A (8/20 μs)


Application

- 10/100 Ethernet
- Integrated magnetics/RJ-45 connectors
- LAN/WAN Equipment
- Security Cameras
- Industrial Controls
- Peripherals
- Notebooks & Desktop Computers


Mechanical Data

- Package: SOP-8
- Molding compound flammability rating: UL 94V-0
- RoHS/WEEE Compliant

Schematic & PIN Configuration



Ordering Information

Part Number	Package	Marking	QTY per Reel	Reel Size
DW2.8-4LVUB-S	SOP-8		2500 pcs	7 inches



Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20\mu\text{s}$)	P_{PP}	800	Watts
Peak Pulse Current ($t_p=8/20\mu\text{s}$) (note1)	I_{PP}	40	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	± 30 ± 30	kV
Lead Soldering Temperature	T_L	260 (10seconds)	$^{\circ}\text{C}$
Junction Temperature	T_J	-55 to + 125	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-55 to + 125	$^{\circ}\text{C}$


Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Stand-Off Voltage	V_{RWM}				2.8	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	3.0			V
Snap-Back Voltage	V_{SB}	$I_{SB}=50\text{mA}$	2.8			V
Reverse Leakage Current	I_R	$V_{RWM}=2.8\text{V}, T=25^{\circ}\text{C}$		50	500	nA
Clamping Voltage	V_C	$I_{PP}=40\text{A}, t_p=8/20\mu\text{s}$		20		V
Junction Capacitance	C_J	$V_R = 0\text{V}, f = 1\text{MHz}$ I/O-I/O		1.5		pF

Electrical Parameters

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{PT}	Punch-through Breakdown Voltage @ I_T
V_{SB}	Snap-Back Voltage @ I_{SB}
I_{SB}	Snap-Back Current

Note: 8/20 μs pulse waveform.

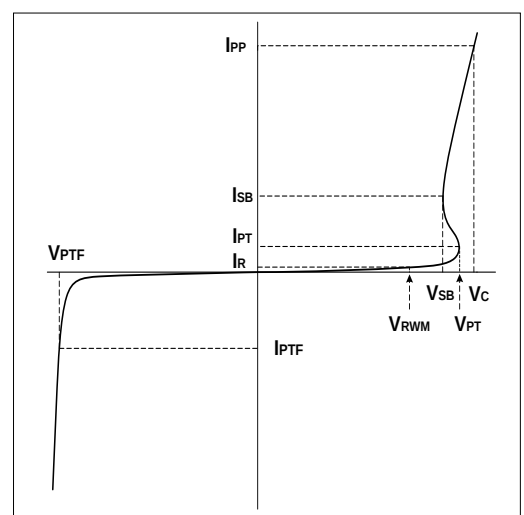



Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

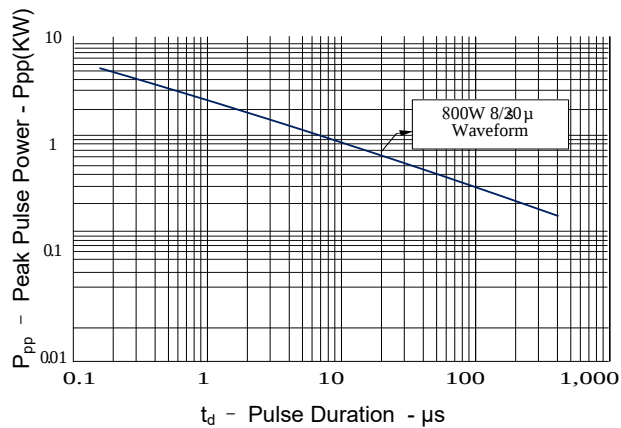


Figure 2: Power Derating Curve

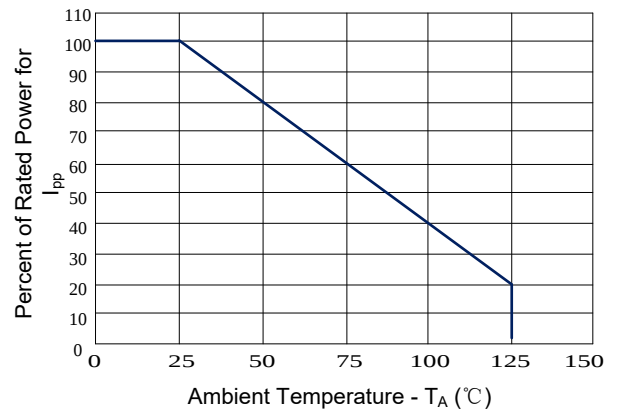


Figure3: Pulse Waveform



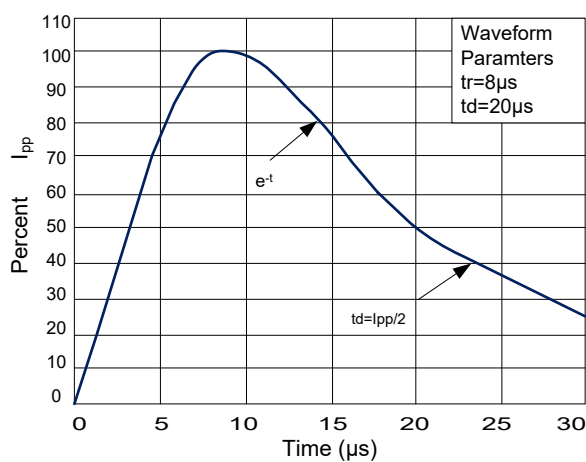


Figure 4: Clamping Voltage vs. Peak Pulse Current



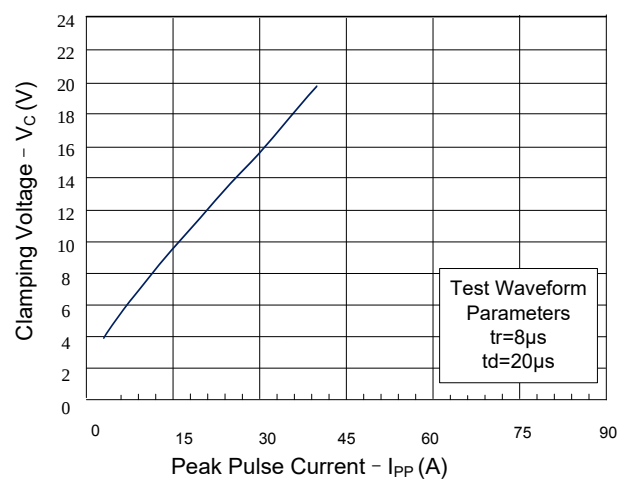

SOP-8 Outline Drawing

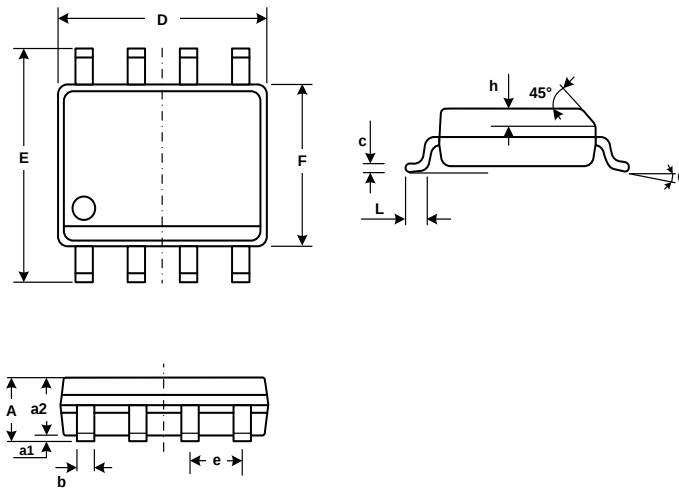

SYMBOL	DIMENSIONS			
	INCHES		MILIMETER	
	MIN	MAX	MIN	MAX
A	0.053	0.069	1.35	1.75
a1	0.004	0.010	0.10	0.25
a2	0.049	0.065	1.25	1.65
D	0.189	0.197	4.80	5.00
F	0.150	0.157	3.80	4.00
E	0.236BSC		6.00BSC	
b	0.012	0.020	0.31	0.51
e	0.050BSC		1.27BSC	
h	0.010	0.020	0.25	0.50
c	0.007	0.010	0.17	0.25
L	0.016	0.041	0.40	1.04
θ	0°	8°	0°	8°