



DWESD1LIN ESD Protection Diode

Feature

- Bi-directional ESD protection of one line
- 450Watts peak pulse power ($t_p = 8/20\mu s$)
- Working voltage: 15/24V
- Junction capacitance: 28pF(Typ)
- Low clamping voltage
- Low leakage current
- AEC-Q101 qualified
- IEC 61000-4-2 $\pm 30kV$ contact $\pm 30kV$ air
- IEC 61000-4-5 (Lightning) 12A/8A (8/20 μs)


Application

- LIN-bus protection
- Automotive applications

Mechanical Data

- Package: SOD-323
- Molding compound flammability rating: UL 94V-0
- RoHS/WEEE Compliant

Schematic & PIN Configuration



Ordering Information

Part Number	Package	Marking	Packing	Reel Size
DWESD1LIN	SOD-323		3000 Tape & Reel	7 inches



Absolute Maximum Rating ($T_A=25^{\circ}\text{C}$ unless otherwise Specified)

Parameter	Symbol	Min.	Max.	Unit
Peak pulse power ($t_p=8/20\mu\text{s}$)@ 25°C	P_{PK}	-	450	W
Peak pulse current ($t_p=8/20\mu\text{s}$, pin1 to 2)@ 25°C	I_{PP}	-	12	A
Peak pulse current ($t_p=8/20\mu\text{s}$, pin2 to 1)@ 25°C	I_{PP}	-	8	A
ESD (IEC61000-4-2 air discharge) @ 25°C	V_{ESD}	-	± 30	kV
ESD (IEC61000-4-2 contact discharge) @ 25°C	V_{ESD}	-	± 30	kV
Junction temperature	T_J	-	150	$^{\circ}\text{C}$
Operating temperature	T_{OP}	-40	125	$^{\circ}\text{C}$
Storage temperature	T_{STG}	-55	150	$^{\circ}\text{C}$
Lead temperature	T_L	-	260	$^{\circ}\text{C}$


Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise Specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse Stand-off Voltage	V_{RWM}	Pin1 to Pin2			15	V
		Pin2 to Pin1			24	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$, Pin1 to Pin2	16.5			V
		$I_T=1\text{mA}$, Pin2 to Pin1	26			V
Reverse Leakage Current	I_R	$V_{RWM}=15\text{V}$			1	μA
		$V_{RWM}=24\text{V}$			1	μA
Clamping Voltage	V_C	$I_{PP}=1\text{A}$; Pin1 to 2; $t_p=8/20\mu\text{s}$		20	22	V
		$I_{PP}=12\text{A}$; Pin1 to 2; $t_p=8/20\mu\text{s}$		26	28	V
		$I_{PP}=1\text{A}$; Pin2 to 1; $t_p=8/20\mu\text{s}$		32	35	V
		$I_{PP}=8\text{A}$; Pin2 to 1; $t_p=8/20\mu\text{s}$		45	48	V
Junction Capacitance	C_J	I/O to GND; $V_R=0\text{V}$; $f=1\text{MHz}$		28	35	pF




Electrical Parameters

Symbol	Parameters
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
I_F	Forward Current
V_F	Forward Voltage @ I_F

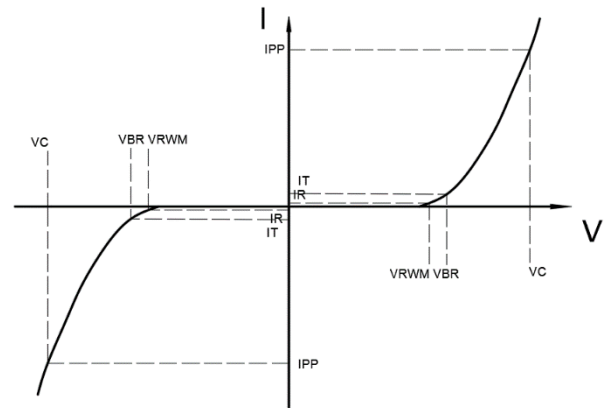


Typical Characteristics

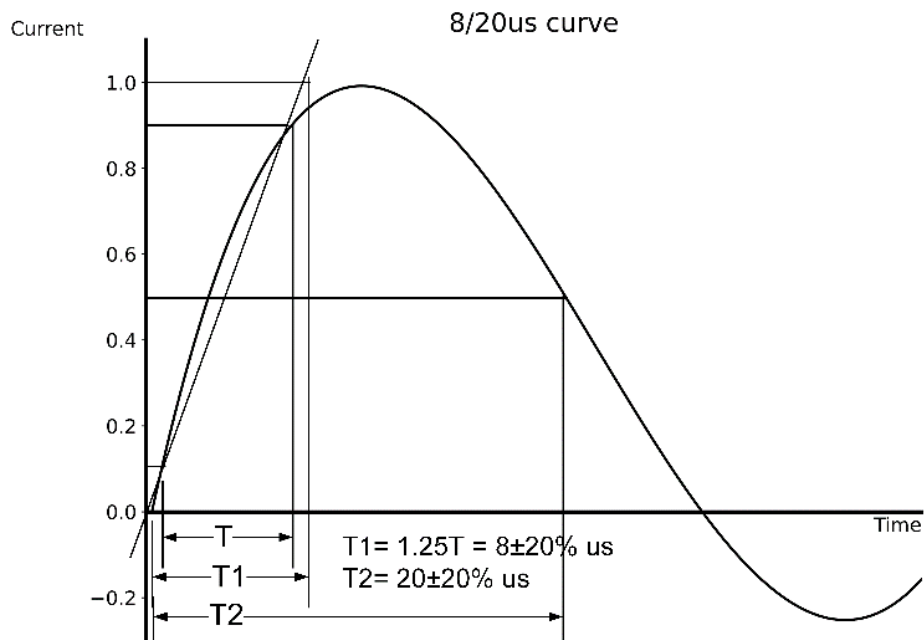



Outline Drawing – SOD-323

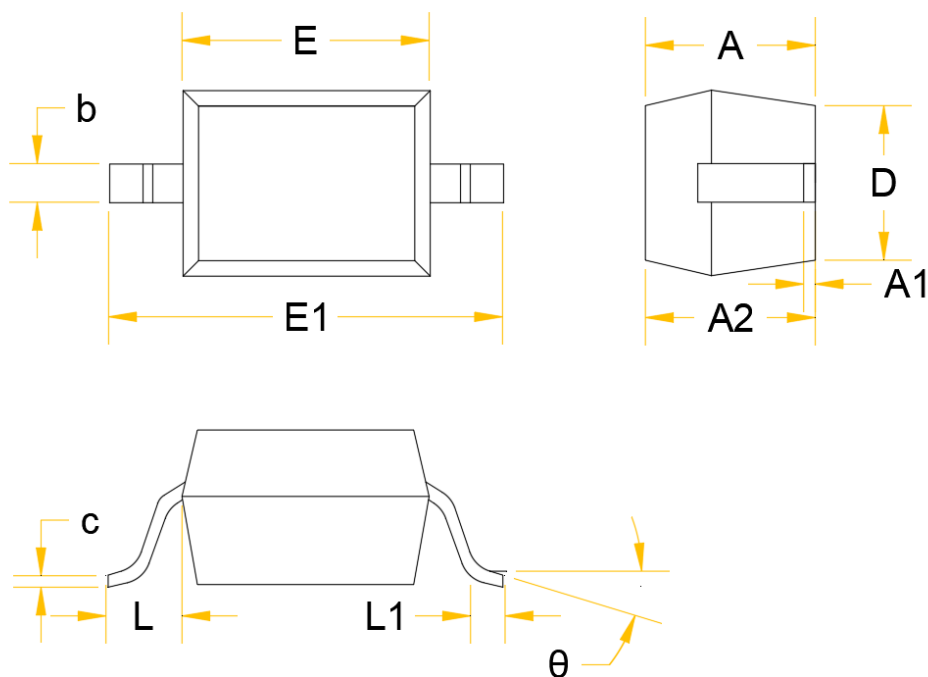

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min.	Max.	Min.	Max.
A		1.000		0.039
A1	0.000	0.100	0.000	0.004
A2	0.800	0.900	0.031	0.035
b	0.250	0.350	0.010	0.014
C	0.080	0.150	0.003	0.006
D	1.200	1.400	0.047	0.055
E	1.600	1.800	0.063	0.071
E1	2.550	2.750	0.100	0.108
L	0.475REF		0.019REF	
L1	0.250	0.400	0.010	0.016
θ	0°	8°	0°	8°