



DWSUC05D3CE-Q ESD Protection Diode

Feature

- Bi-directional ESD protection of one line
- 100Watts peak pulse power ($t_p = 8/20\mu s$)
- Working voltage: 5V
- Junction Capacitance: 0.7pF(Typ)
- Low clamping voltage
- Low leakage current
- AEC-Q101 qualified
- IEC 61000-4-2 $\pm 25kV$ contact $\pm 25kV$ air
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 7A (8/20 μs)


Application

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation


Mechanical Data

- Package: SOD-323
- Molding compound flammability rating: UL 94V-0
- RoHS/WEEE compliant

Schematic & PIN Configuration



Ordering Information

Part Number	Package	Marking	QTY per Reel	Reel Size
DWSUC05D3CE-Q	SOD-323		3000 pcs	7 inches



Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20\mu\text{s}$)	P_{PP}	100	Watts
Peak Pulse Current ($t_p=8/20\mu\text{s}$) (note1)	I_{PP}	7	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	± 25 ± 25	kV
Lead Soldering Temperature	T_L	260 (10seconds)	$^{\circ}\text{C}$
Junction Temperature	T_J	-55 to + 125	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-55 to + 125	$^{\circ}\text{C}$


Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Stand-Off Voltage	V_{RWM}				5.0	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	6.0	8.8		
Reverse Leakage Current	I_R	$V_{RWM}=5\text{V}, T=25^{\circ}\text{C}$		0.1	0.5	μA
ESD Clamping Voltage	V_C	$I_{TLP}=7\text{A}, t_p=0.2/100\text{ns}$			16	V
Junction Capacitance	C_j	$V_R = 0\text{V}, f = 1\text{MHz}$		0.7	0.8	pF

Electrical Parameters

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current

Note: 8/20 μs pulse waveform.

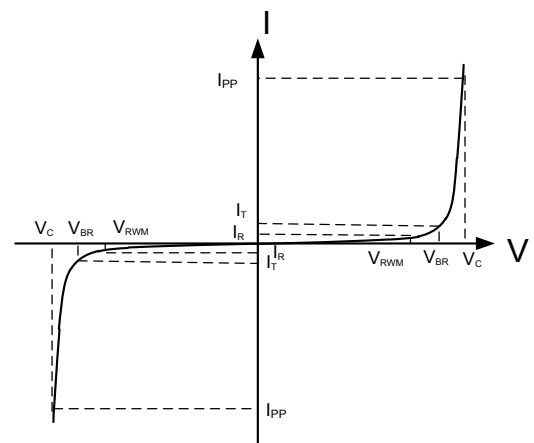



Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

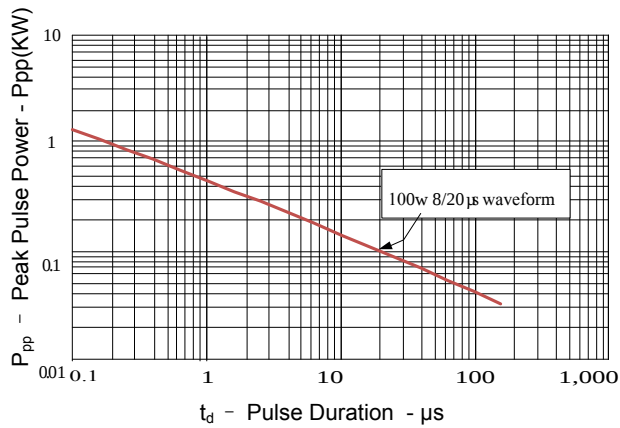


Figure 2: Power Derating Curve

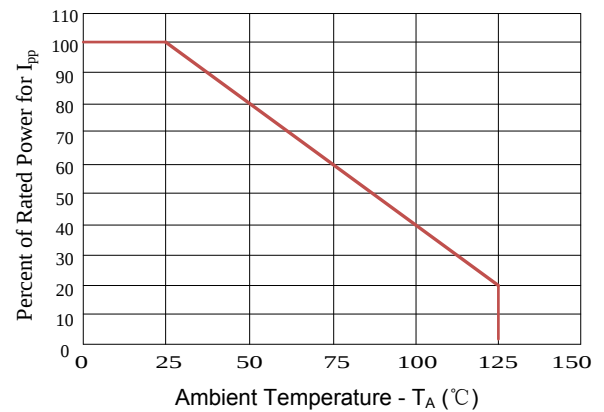


Figure3: Pulse Waveform



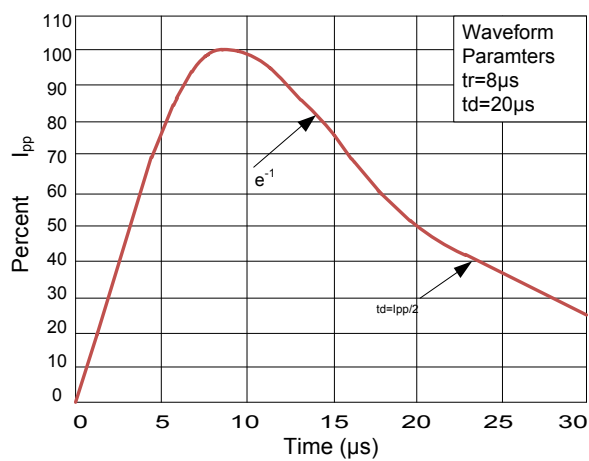


Figure 4: Clamping Voltage vs. Ipp



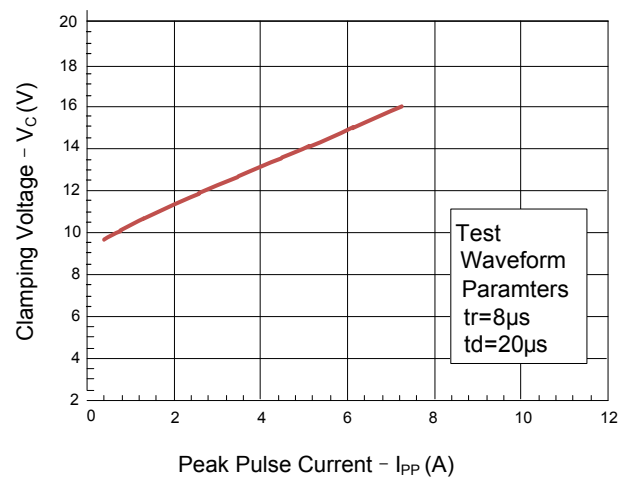

SOD-323 Outline Drawing

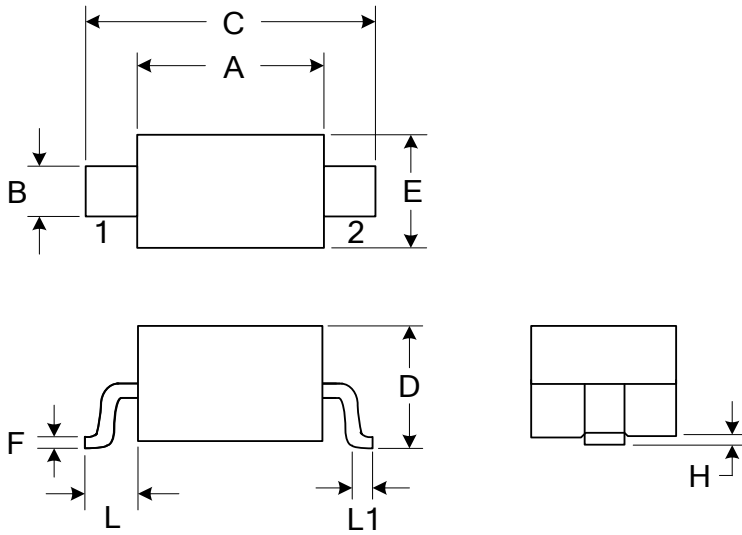

DIMENSIONS				
SYMBOL	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	1.600	1.800	0.063	0.071
B	0.250	0.350	0.010	0.014
C	2.500	2.700	0.098	0.106
D		1.000		0.039
E	1.200	1.400	0.047	0.055
F	0.080	0.150	0.003	0.006
L	0.475 REF		0.019REF	
L1	0.250	0.400	0.010	0.016
H	0.000	0.100	0.000	0.004