



DWU2021D5-Q ESD Protection Diode

Feature

- Bi-directional ESD protection of one line
- 145Watts peak pulse power ($t_p = 8/20\mu s$)
- Working voltage: 20V
- Junction capacitance: 5pF(Typ)
- Ultra low leakage: nA level
- Low clamping voltage
- AEC-Q101 qualified
- IEC 61000-4-2 $\pm 30kV$ contact $\pm 30kV$ air
- IEC 61000-4-5 (Lightning) 4A (8/20 μs)


Application

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Digital Cameras
- Peripherals
- Audio Players

Mechanical Data

- Package: SOD-523
- Molding compound flammability rating: UL 94V-0
- RoHS/WEEE Compliant

Schematic & PIN Configuration



Ordering Information

Part Number	Package	Marking	QTY per Reel	Reel Size
DWU2021D5-Q	SOD-523		3000 pcs	7 inches



Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise specified)


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	P_{PK}	145	W
Peak Pulse Current (8/20 μs)	I_{PP}	4	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	± 30 ± 30	kV
Operating Temperature Range	T_J	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	V_{RWM}			20	V	
Breakdown Voltage	V_{BR}	24		31.5	V	$I_T = 1\text{mA}$
Reverse Leakage Current	I_R			0.1	μA	$V_{RWM} = 20\text{V}$
Clamping Voltage	V_C			28	V	$I_{PP} = 1\text{A}$ (8 x 20 μs pulse)
Clamping Voltage	V_C			36	V	$I_{PP} = 4\text{A}$ (8 x 20 μs pulse)
Junction Capacitance	C_J		5		pF	$V_R = 0\text{V}$, $f = 1\text{MHz}$




Typical Performance Characteristics

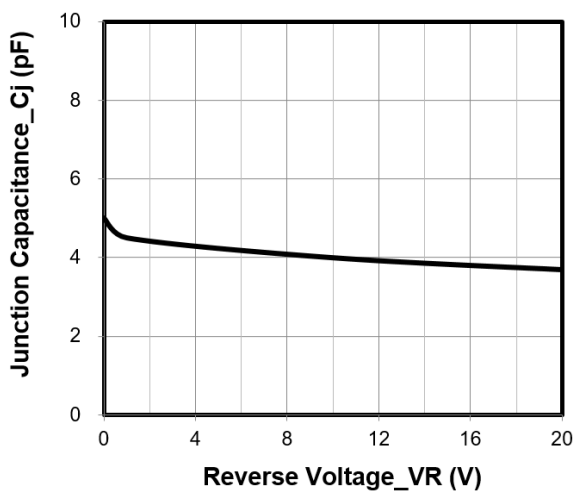


Junction Capacitance vs. Reverse Voltage

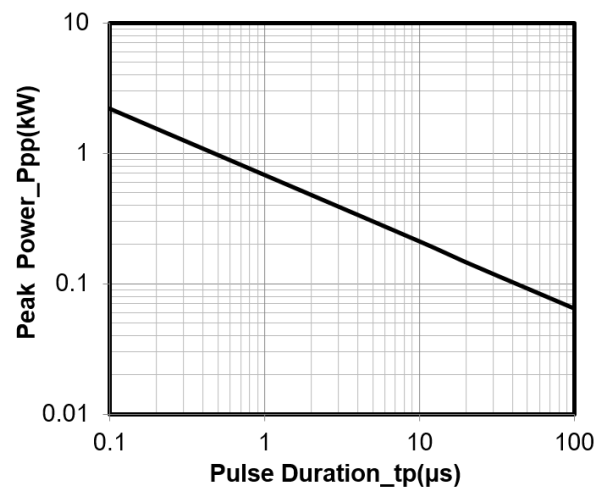


Peak Pulse Power vs. Pulse Time

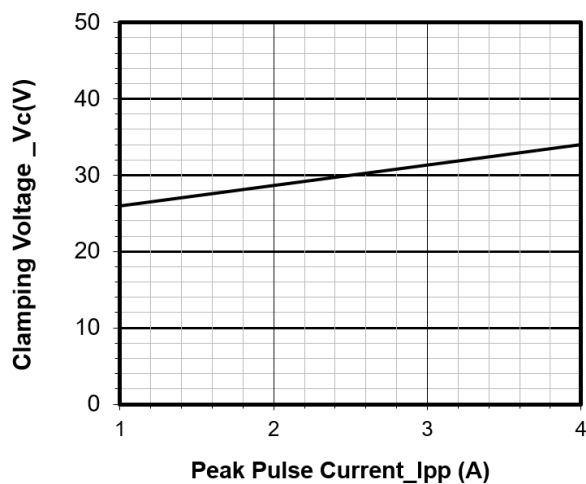


Clamping Voltage vs. Peak Pulse Current

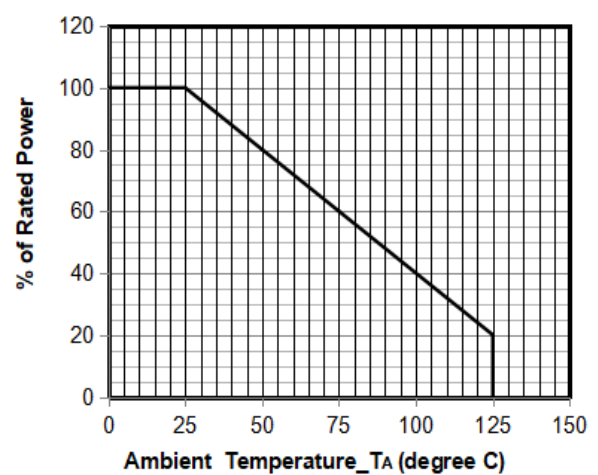

Power Derating Curve

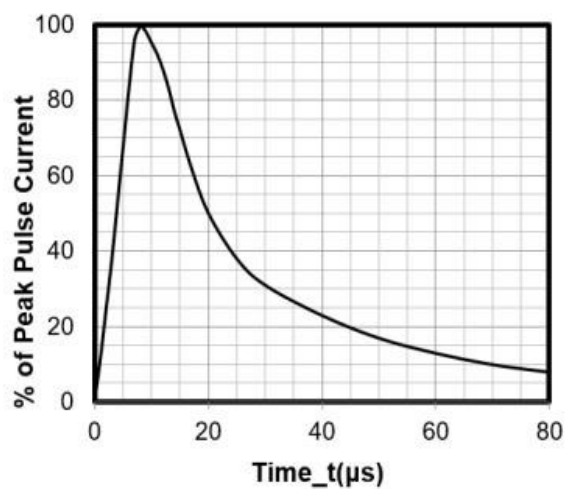

8 X 20μs Pulse Waveform

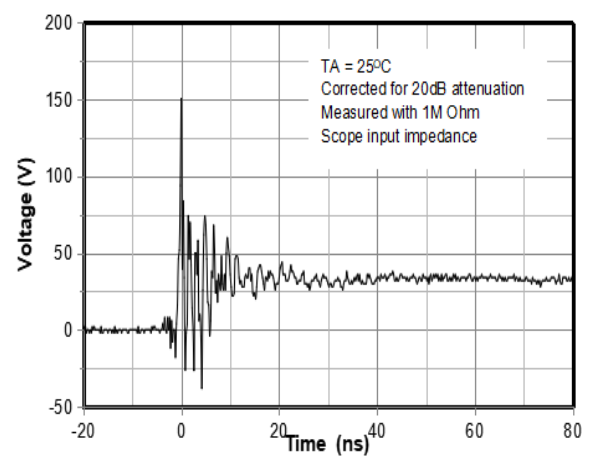


ESD Clamping Voltage

8 kV Contact per IEC61000-4-2




SOD-523 Package Outline Drawing

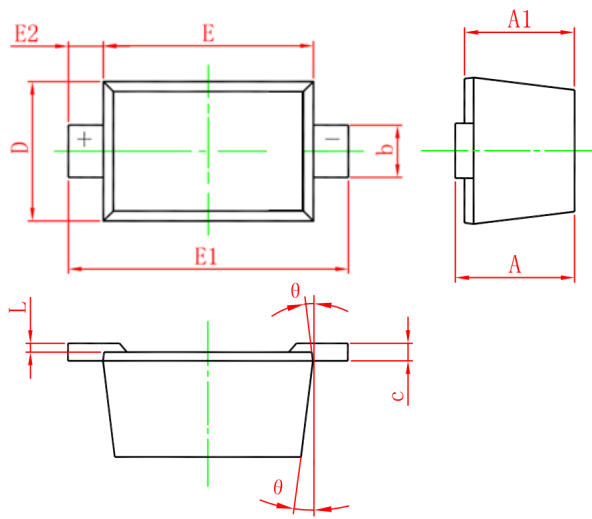

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.51	--	0.77	0.020	--	0.031
A1	0.50	--	0.70	0.020	--	0.028
b	0.25	--	0.35	0.010	--	0.014
c	0.08	--	0.15	0.003	--	0.006
D	0.75	--	0.85	0.030	--	0.033
E	1.10	--	1.30	0.043	--	0.051
E1	1.50	--	1.70	0.059		0.067
E2	0.20REF			0.008REF		
L	0.01	--	0.07	0.001	--	0.003
Θ	7° REF			7° REF		

Suggested Land Pattern

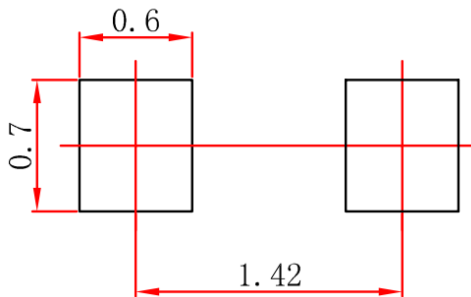

Unit: mm