


SOT-23 Plastic-Encapsulate Transistor (NPN)

Feature

- High DC current gain: $h_{FE}=200(\text{Typ})$, $V_{CE}=6V$, $I_C=1mA$
- Power Dissipation of 200mW
- High Stability and High Reliability



1. BASE
2. EMITTER
3. COLLECTOR

SOT-23

Mechanical Data

- SOT-23 Small Outline Plastic Package
- Epoxy UL: 94V-0
- Mounting Position: Any

Maximum Ratings & Thermal Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	60	V
Collector-Emitter Voltage	V_{CEO}	50	V
Emitter -Base Voltage	V_{EBO}	5	V
Collector Current-Continuous	I_C	100	mA
Collector Power Dissipation	P_C	200	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55-+150	$^\circ\text{C}$
Thermal resistance From junction to ambient	$R_{\theta JA}$	625	$^\circ\text{C/W}$

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)







Parameter	Symbol	Test Condition	Limit			Unit
			Min	Typ	Max	
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu A$, $I_E=0$	60			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1mA$, $I_B=0$	50			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu A$, $I_C=0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB}=60V$, $I_E=0$			100	nA
Emitter cut-off current	I_{EBO}	$V_{EB}=5V$, $I_C=0$			100	nA
DC current gain	h_{FE}	$V_{CE}=6V$, $I_C=1mA$	90	200	600	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=100mA$, $I_B=10mA$			0.30	V
Base -emitter saturation voltage	$V_{BE(sat)}$	$I_C=100mA$, $I_B=10mA$			1.00	V
Transition frequency	f_T	$V_{CE}=6V$, $I_C=10mA$, $f=30MHz$		250		MHz



Classification of h_{FE}

Rank	2SC1623-L4	2SC1623-L5	2SC1623-L6	2SC1623-L7
Range	90~180	135~270	200~400	300~600
Marking	L4	L5	L6	L7





Typical Characteristics

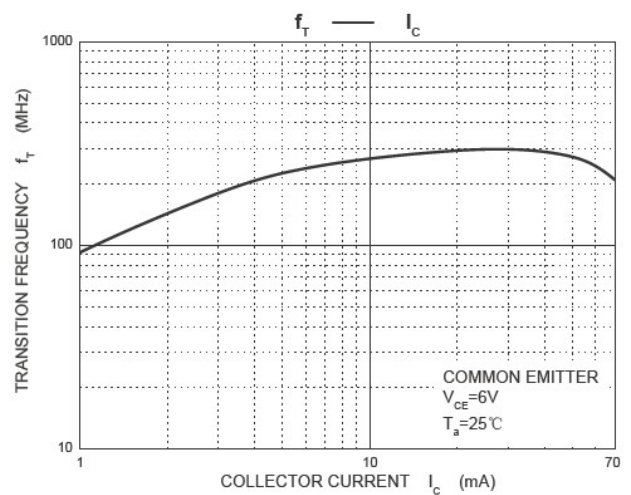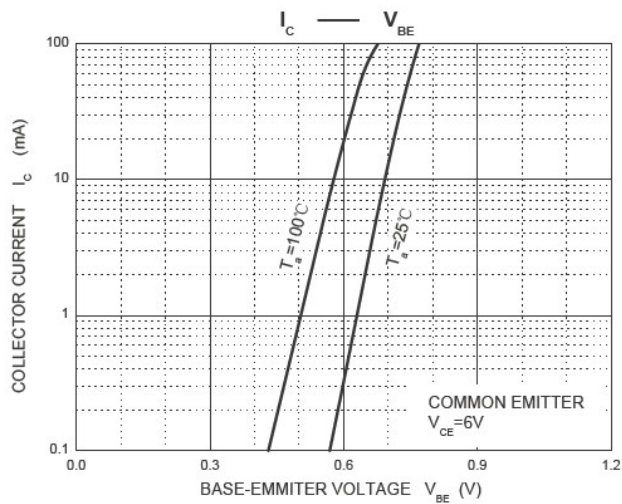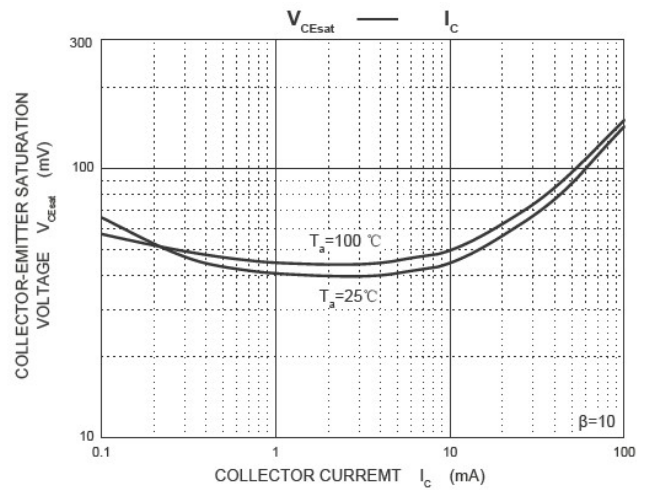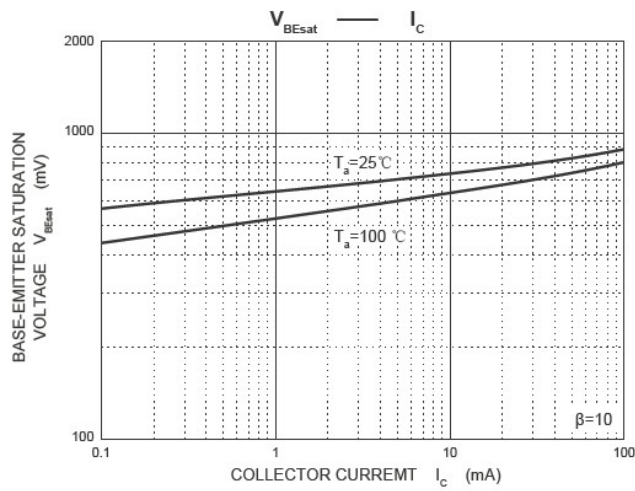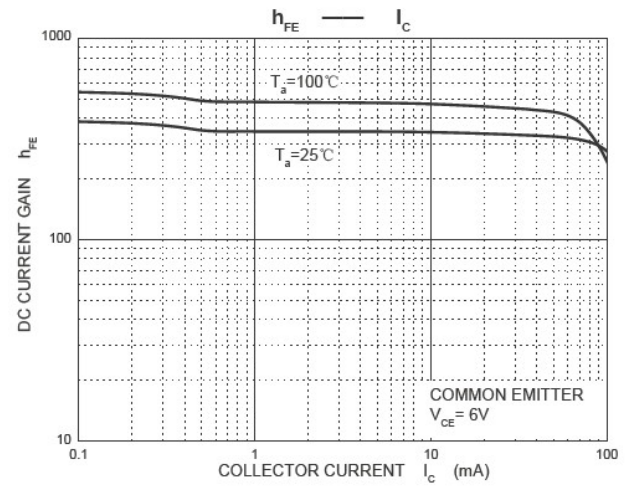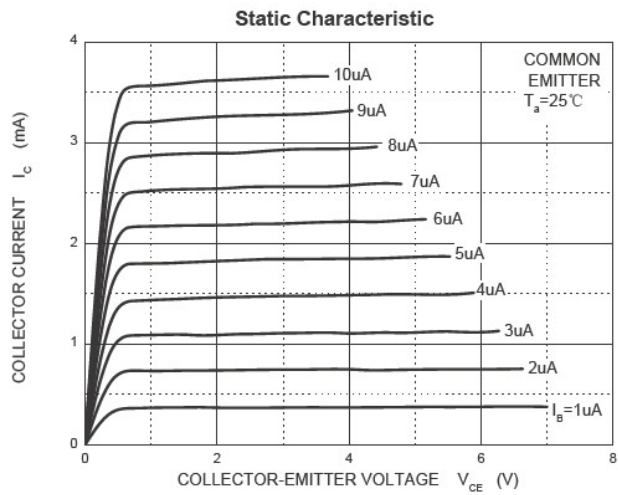

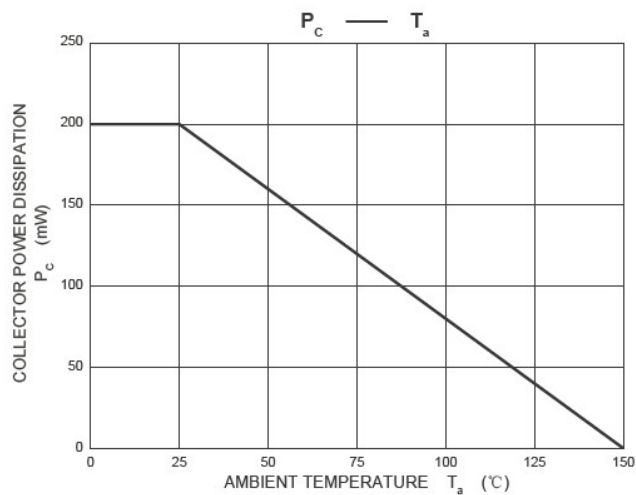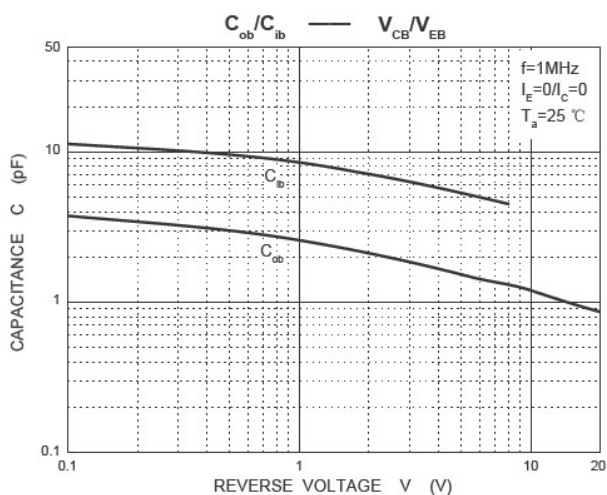


SOT-23 Package Dimension

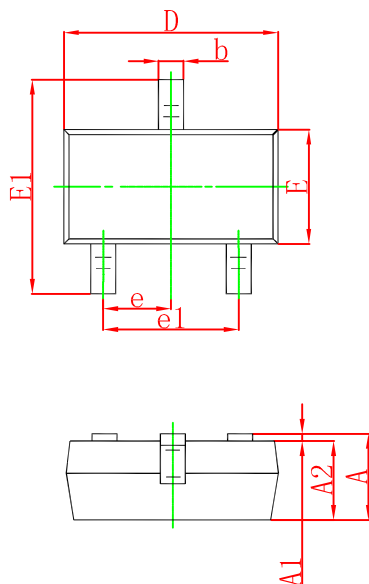

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout



Notes:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.