



DW03D5-B-E ESD Protection Diode

Feature

- Bi-directional ESD protection of one line
- 80Watts peak pulse power ($t_p = 8/20\mu s$)
- Working voltage: 3.3V
- Junction Capacitance: 18pF(Typ)
- Low clamping voltage
- Low leakage current
- IEC 61000-4-2 $\pm 25kV$ contact $\pm 25kV$ air
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 10A (8/20 μs)


Application

- Microprocessor based equipment
- Personal Digital Assestants(PDA's)
- Notebooks, Desktops, and Servers
- Pagers Peripherals

Mechanical Data

- Package: SOD-523
- Molding compound flammability rating: UL 94V-0
- RoHS/WEEE Compliant

Schematic & PIN Configuration



Ordering Information

Part Number	Package	Marking	QTY per Reel	Reel Size
DW03D5-B-E	SOD-523		5000 pcs	7 inches




Absolute Maximum Rating ($T_A=25^{\circ}\text{C}$ unless otherwise Specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	P_{pk}	80	W
Peak Pulse Current (8/20 μs)	I_{PP}	10	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	± 25 ± 25	kV
Lead Soldering Temperature	T_L	260 (10seconds)	$^{\circ}\text{C}$
Junction Temperature	T_J	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55 to +125	$^{\circ}\text{C}$

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise Specified)

Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Stand-Off Voltage	V_{RWM}				3.3	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	4.0			V
Reverse Leakage Current	I_R	$V_{RWM}=3.3\text{V}, T=25^{\circ}\text{C}$			0.5	μA
Clamping Voltage	V_C	$I_{PP}=10\text{A}, t_p=8/20\mu\text{s}$		8		V
Junction Capacitance	C_J	$V_R = 0\text{V}, f = 1\text{MHz}$ IO to IO		18		pF

Electrical Parameters

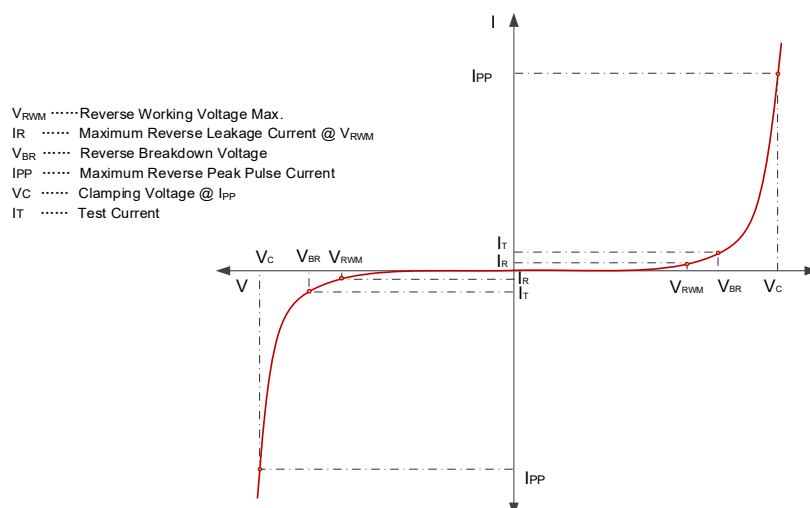

Note1: 8/20 μs pulse waveform.



Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

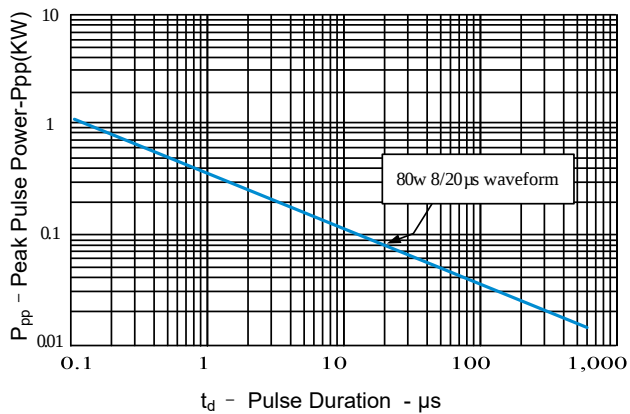


Figure 2: Power Derating Curve

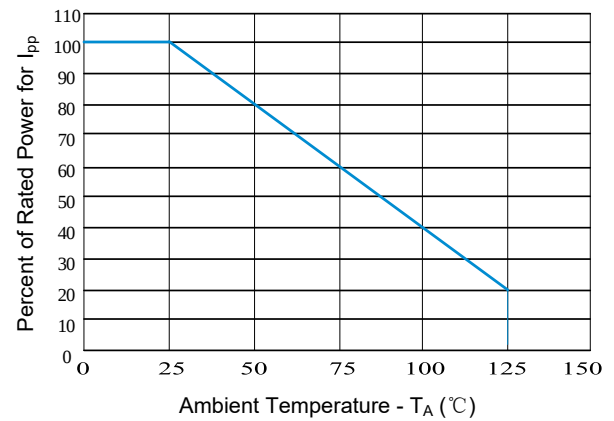


Figure3: Pulse Waveform



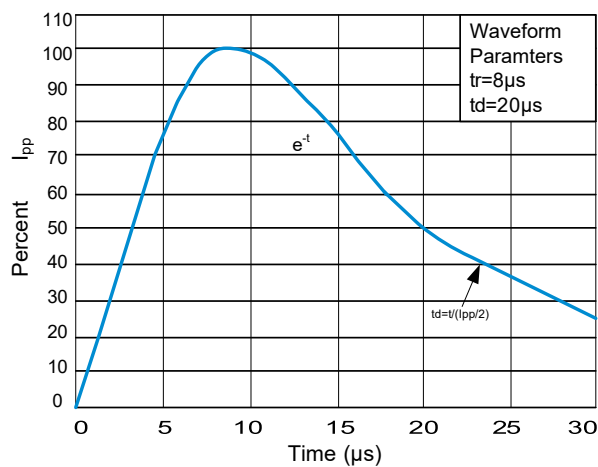


Figure 4: Clamping Voltage vs. Ipp



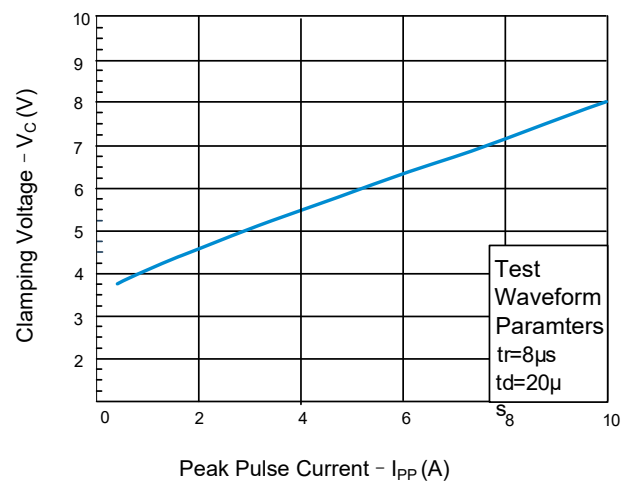

SOD-523 Outline Drawing

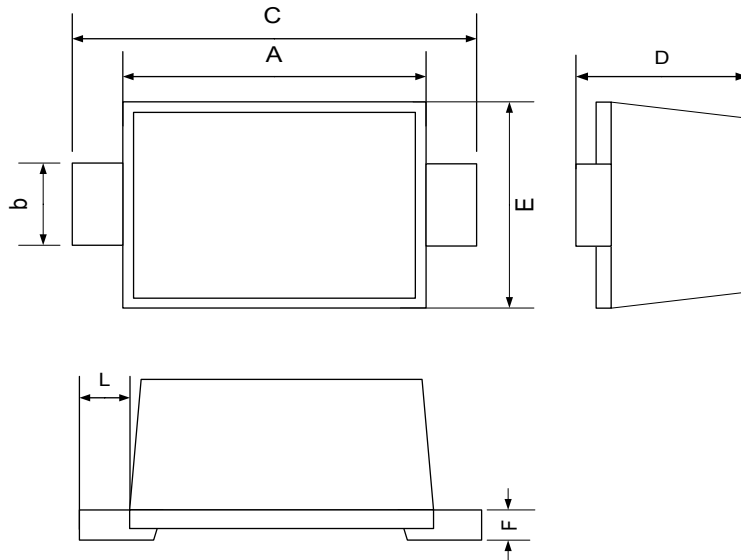

Common Dimension (mm)			
PKG	SOD523		
REF.	MIN.	NOM.	MAX.
A	1.100	1.200	1.300
b	0.250	0.300	0.350
C	1.500	1.600	1.700
D	0.510	0.650	0.770
E	0.700	0.800	0.900
F	0.070	0.140	0.200
L		0.200	